




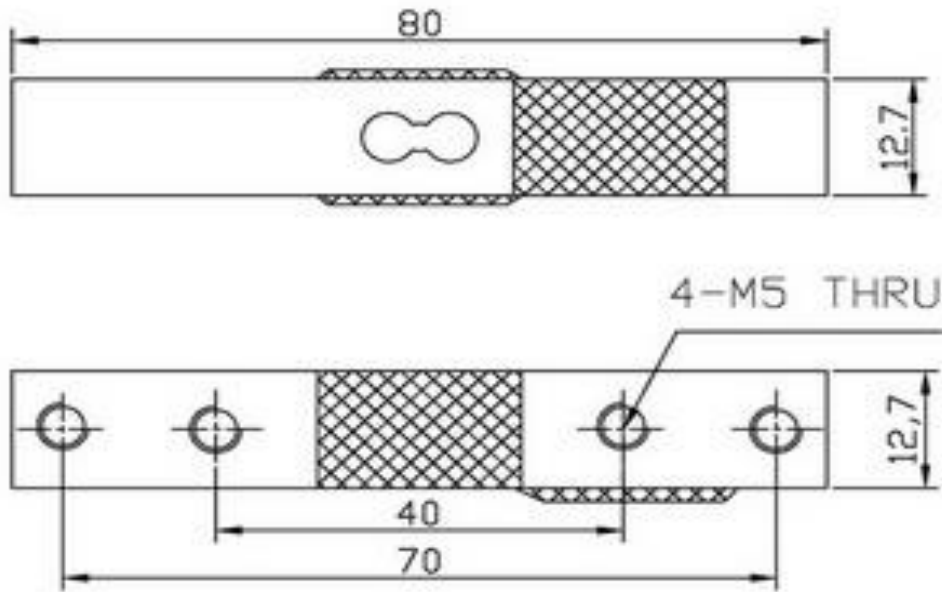

Single Point Kitchen Scales Load Cells AMA

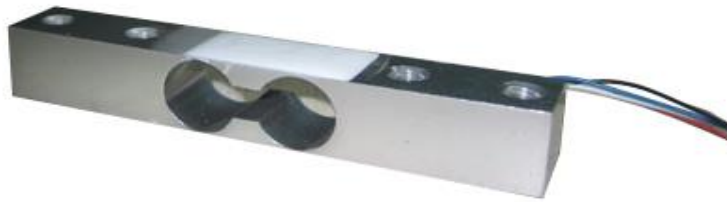

Wiring Diagram

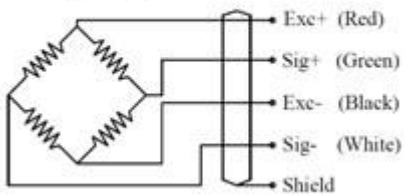

Specification

Model	Kitchen Scales AMA
Capacity	0.6, 1, 2, 3, 5, 10, 20KG
Output Sensitivity	1.0±15% mV/V
Nonlinearity	±0.05 %F.S
Repeatability	±0.05 %F.S
Hysteresis	±0.05 %F.S
Creep (5 mins)	±0.05 %F.S / 5 Mins
Temperature effect on Output	±0.05 %F.S/ °C
Temperature effect on Zero	±2.0 %F.S/ °C
Zero Balance	±10 %F.S
Input Impedance	Input Impedance
Input Impedance Output Impedance	1000±10 Ω
Insulation Resistance	2000 MΩ
Recommend Excitation Voltage	≤6V
Operating Temperature Range	-10~+40°C
Safe Overload	150 %F.S
Ultimate Overload	200 %F.S
Material	Aluminium
Cable Length	φ0.9mm× 0.2 M