





NTEP Double Ended Shear Beam Load Cells BSD

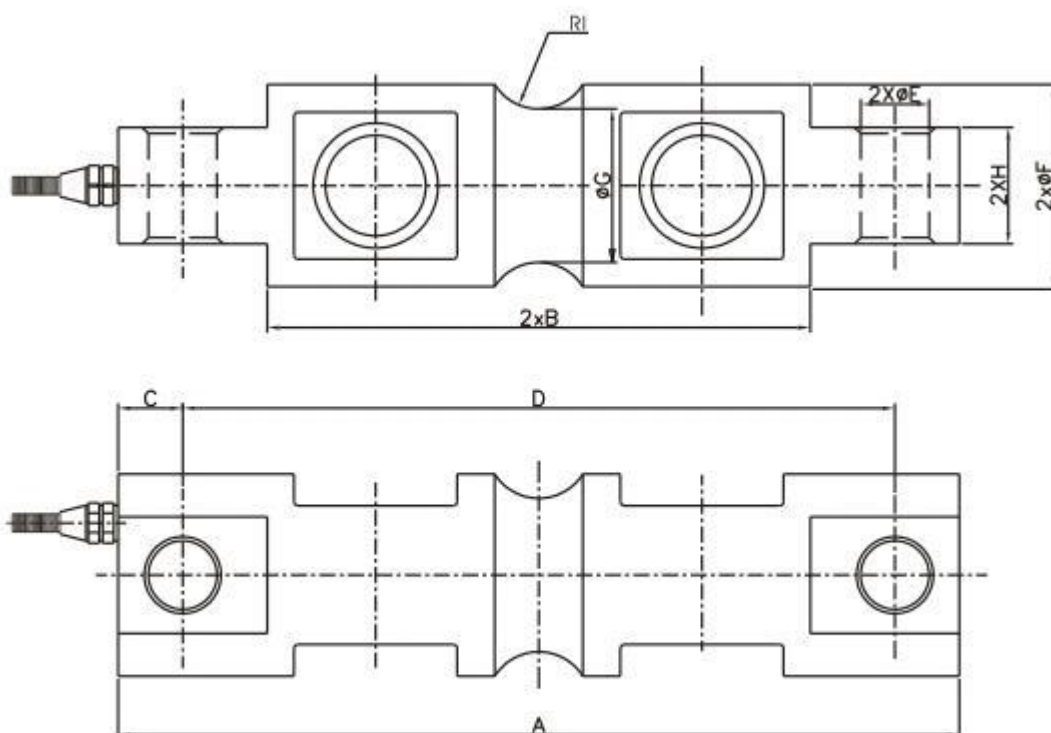

量程 (kg)	尺寸 (inch)	A	B	C	D	E	F	G	H	I
5, 10		8.12	5.24	0.62	6.88	0.66	1.70	1.48	1.12	0.50
20, 25		8.12	5.24	0.62	6.88	0.66	1.95	1.48	1.12	0.50
30, 50 60, 75		10.25	6.48	0.88	8.50	1.06	3.00	2.73	2.37	1.00
100		11.25	7.48	0.88	9.50	1.06	3.50	3.24	2.50	1.5

Wiring Diagram

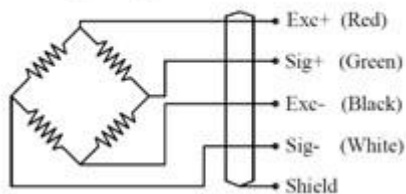

Specification:

Application	Truck Scales, Railway Scales, Axle Scales , Floor Scales, Warehouse Scale
Rated Load	5,10,20,25,30,50,60,70,100klb
Sensitivity	3.0±0.003mV/V
Total error	±0.03%F.S; ±0.05%F.S
Creep(30min)	±0.02%F.S
Zero balance	±1%F.S
TCO	±0.02%F.S/10℃
TC SPAN	±0.02%F.S/10℃
Input resistance	750±10Ω
Output resistance	703±2Ω, 703±5Ω
Insulation resistance	≥5000MΩ
OperatingTemp Range	-30～+70℃
Safe load limit	150%F.S
Over load limit	250%F.S
Recommend excitation	10～12V DC
Maximum excitation	15V DC
Protection Class	IP68
Construction	Alloy Steel/Stainless
Cable	(L≥15M) Length=L;6m(5,10klb),8m(20.25.30klb), 12m(50,60klb),16m(100klb)Diameter:Φ5mm(5-10klb), Φ6mm(20-100klb)