





Double Ended Shear Beam Load Cells BSE

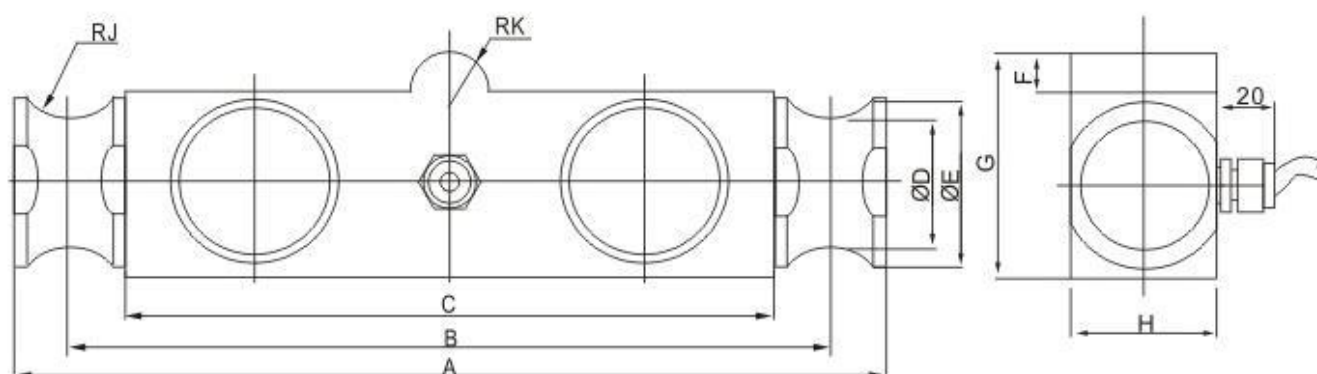

额定载荷(klb) Rated Load	A	B	C	D	E	F	G	H	J	K
25,40,50	210	185	159	41	51	13	64	51	13	13
60,75	292	254	216	43	56	13	76	51	21	13

Wiring Diagram

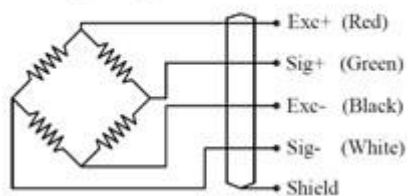

Specification

Application	Truck Scales, Railway Scales, Axle Scales , Floor Scales ,Warehouse Scales
Rated Load	25,40,50,60,75,100,125klb
Sensitivity	3.0±0.003mV/V
Total error	±0.05%F.S
Creep(30min)	±0.02%F.S
Zero balance	±1%F.S
TCO	±0.02%F.S/10℃
TC SPAN	±0.02%F.S/10℃
Input resistance	750±10Ω
Output resistance	702±3Ω
Insulation resistance	≥5000MΩ
OperatingTemp Range	-30~+70℃
Safe load limit	150%F.S
Over load limit	250%F.S
Recommend excitation	10~12V DC
Maximum excitation	15V DC
Protection Class	IP68
Construction	Alloy Steel-S/-SS;Stainless steel
Cable	Length;12m (25-50klb) , 16m (60-75klb) Diameter:Φ6mm