




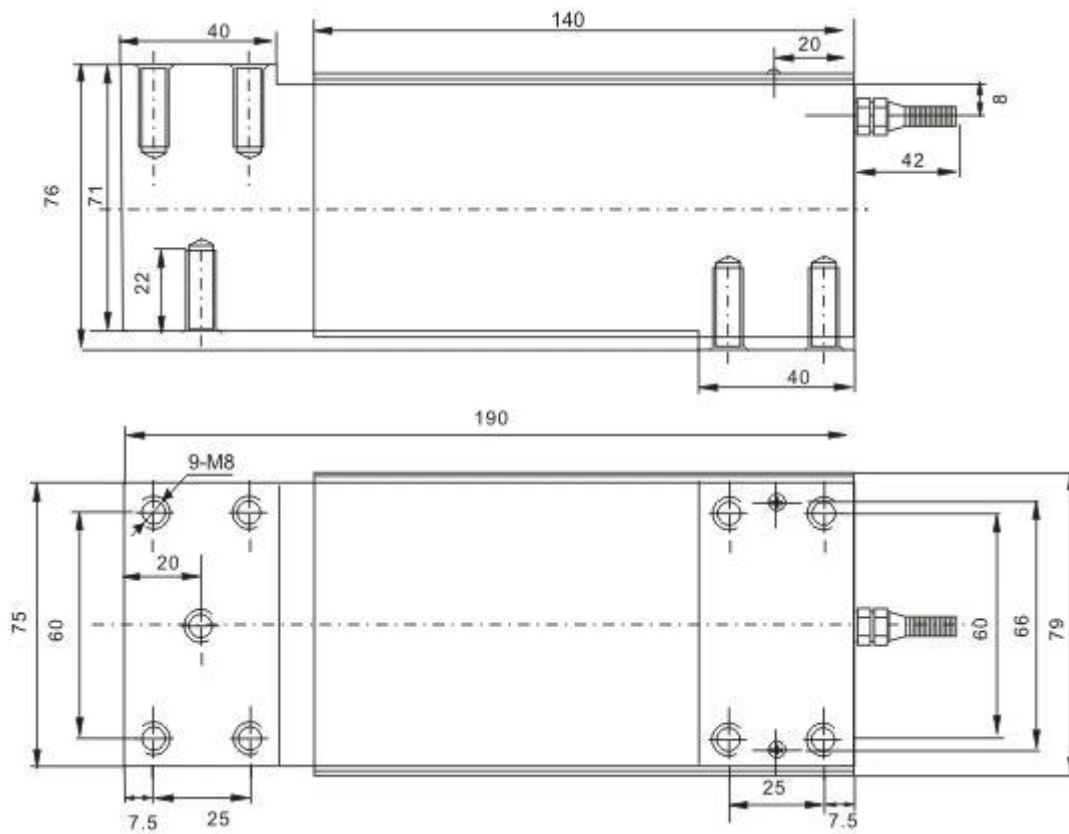

### Single Point Blending Beam Load Cells SMG

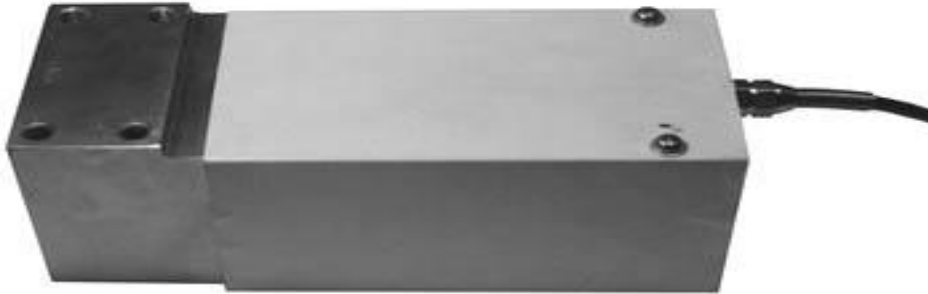

#### Wiring Diagram

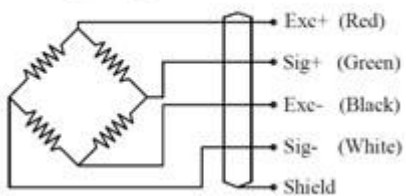

## Specification

Application	Blending Scales, Packaging Scales, dynamic testing System, Platform scales
Rated Load	50, 75, 100, 120, 250, 300kg, 1000kg
Sensitivity	2±0.2mV/V
Zero balance	±1%F.S
Temperature Range Compensated	-10~+40°C
Operating Temp Range	-30~+70°C
Accuracy Class	C2-C5
Safe load limit	150%F.S
Over load limit	200%F.S
TCO	±0.02%F.S/10°C
TC SPAN	±0.02%F.S/10°C
Insulation resistance	≥5000MΩ
Maximum excitation	15V DC
Recommend excitation	10~12V DC
Protection Class	IP65
Input resistance	400±2Ω
Construction	Alloy Steel
Output resistance	352±3Ω
Cable: Length;	3m, Diameter: Φ5mm