



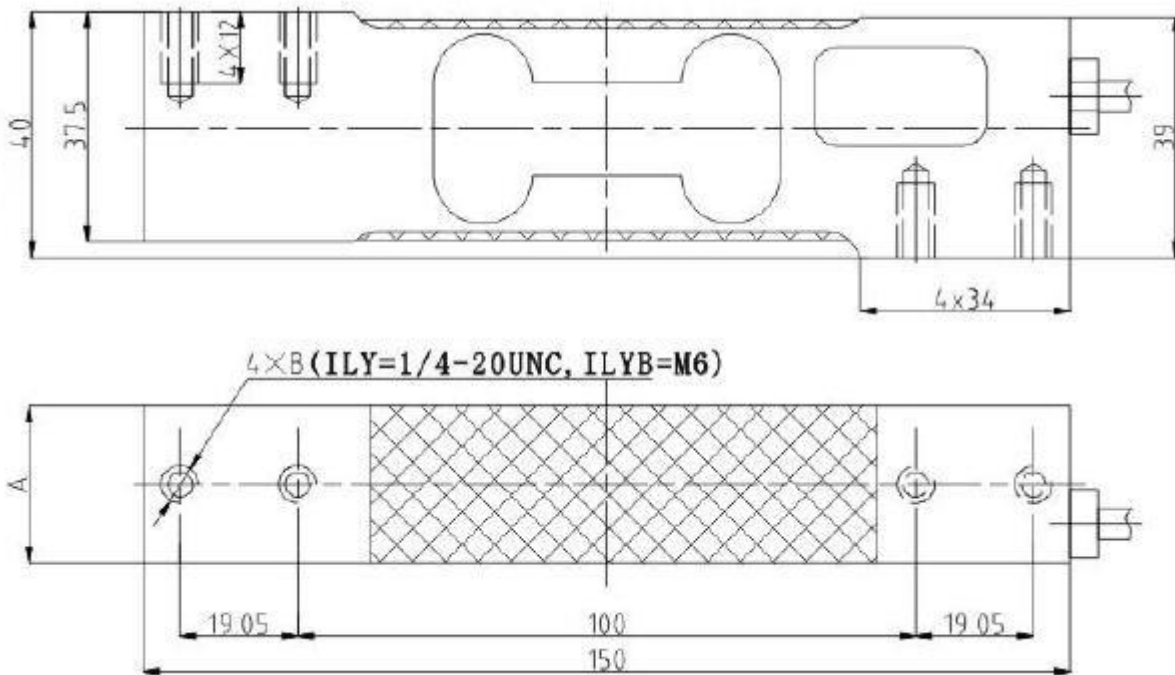


Stainless Steel Single Point Platform Scale Load Cells SMK-SS

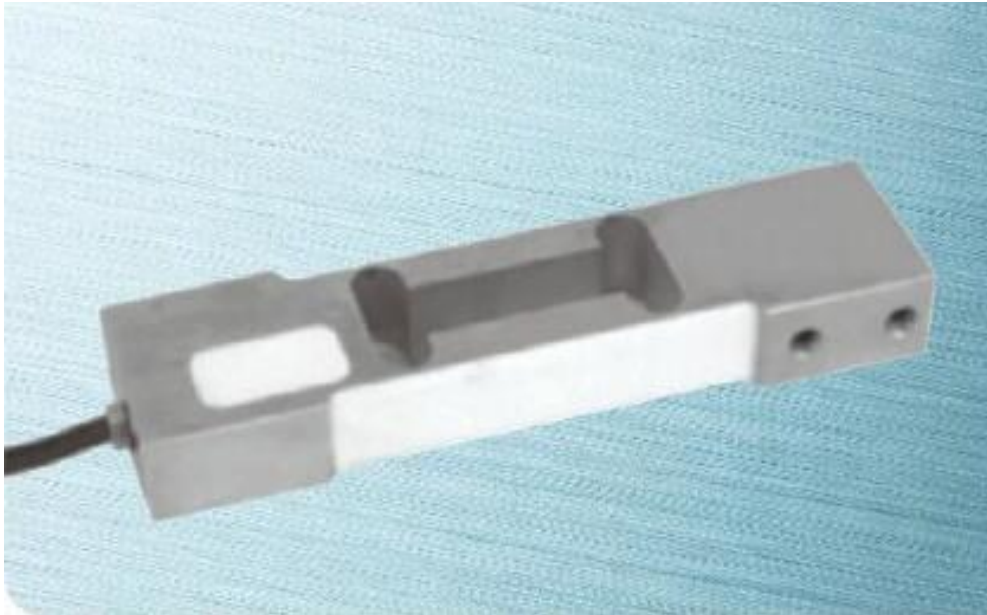

额定载荷	A
8~30kg	20
50~100kg	25.2

Wiring Diagram

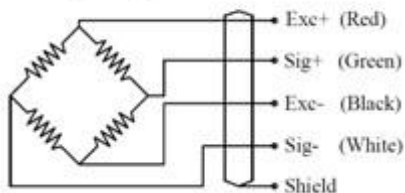

Specification

Application :	Blending scale, packing scale, dynamic testing system, platform scale
Model :	SMK-SS
Capacity	8,10,15, 20,30,50,60,100kg
Output Sensitivity	2.0± 0.2 MV/V
Accuracy Class	OIML C3
Creep(30 min)	±0.03%F.S
Non-linearity	±0.03%F.S
Hysteresis Error	±0.03%F.S
TC ZERO	±0.02%F.S/10°C
TC SPAN	±0.02%F.S/10°C
Input Impedance	400 ± 20Ω
output Impedance	352 ± 5Ω
Max Platform Size	400×400MM
Insulation Resistance	≥5000 MΩ
Recommend Excitation Voltage	10V
Maximum Excitation Voltage	15V
Operating Temperature Range	-10~+40°C
Service Temperature Range	-30~+70°C
Safe Overload	150 %F.S
Ultimate Overload	300 %F.S
Protection Grade	IP65
Material	Alloy Steel /Stainless Steel
Cable Length	Φ5× 1.8M