



## Platform Scale Weighing Indicator XK3190-T4



### Application:

Electronic Floor scale, Bench Scale Logistics Scale, Pet Scale, Load cells etc.

### Technical Parameters:

Display:6-Digit 20mm LED or 25mm LCD backlight

Accuracy Class: OIML C3

AD Convert :  $\Sigma - \Delta$ ,24 bit Input Voltage:-7mV-12.8mV

Resolving: display 15000, internal code 1,000,000

Minimum resolution: 1 $\mu$ V/e

Excitation Voltage:DC3.3V

Load cell interface:4-wire, 1-4 350 $\Omega$  analog load cells

Power supply: AC110/220V 50/60HZ or built-in 4V/4Ah Lead acid battery

Work environment : -10 $^{\circ}$ C--+40 $^{\circ}$ C,  $\leq$ 85%RH

Battery enduring life:50 hours for continuously use ( with 4 350 $\Omega$  analog load cells )

### Options:


Second display interface: serial RS232

Communication interface:RS232, baud rate 600-9600(optional)

Printing interface: shared with serial interface, can be connected to serial printer (optional: desktop printer)

Bluetooth

## Production Functions:

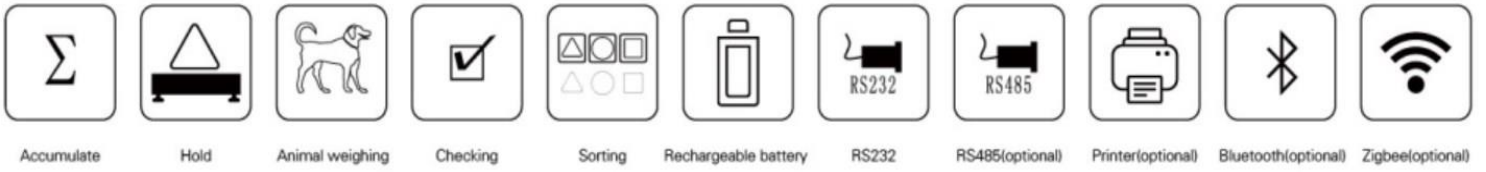

## Dimensions:

Unit (mm)

