



LED Platform Scale Weighing Indicator XK3190-T4E



Application:

Electronic Floor scale, Bench Scale Logistics Scale, Pet Scale, Load cells etc.

Technical Parameters:

Display:6-Digit 20mm LED or 25mm LCD backlight

Accuracy Class: OIML C3

AD Convert : $\Sigma - \Delta$,24 bit Input Voltage:-7mV-12.8mV

Resolving: display 15000, internal code 1,000,000

Minimum resolution: 1 μ V/e

Excitation Voltage:DC3.3V

Load cell interface:4-wire, 1-4 350 Ω analog load cells

Power supply: AC110/220V 50/60HZ or built-in 4V/4Ah Lead acid battery

Work environment : -10 $^{\circ}$ C--+40 $^{\circ}$ C, \leq 85%RH

Battery enduring life:50 hours for continuously use (with 4 350 Ω analog load cells)

Options:


Second display interface: serial RS232

Communication interface:RS232, baud rate 600-9600(optional)

Printing interface: shared with serial interface, can be connected to serial printer (optional: desktop printer)

Bluetooth

Production Functions:

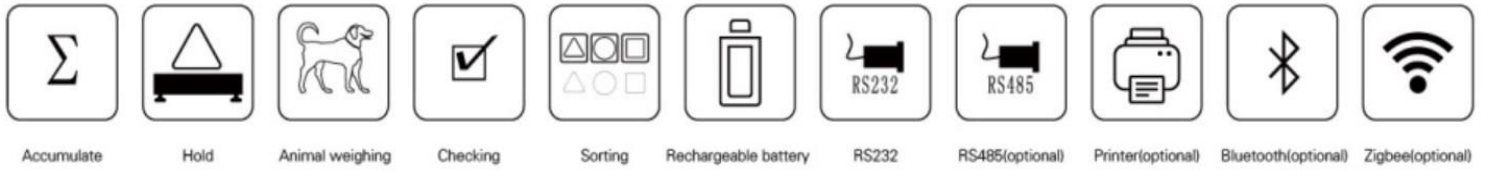

Dimensions:

Unit (mm)

