



Large Screen LED Weighing Indicator XK3190-T5E



Technical Parameters:

Display:6-digit 500mm LED or LCD with backlight

Accuracy class: OIML C3 Class

AD convert: Σ - Δ , 24 bit

Input voltage:-6mV-19.5 mV

Resolving: display 15,000, internal code 1,000,000

Minimum resolution:1 μ V/e

Excitation voltage:DC3.3V

Load cell interface:1-4pcs 350 Ω analog load cells

Power supply: AC110/220V 50/60HZ or built-in 4V/4Ah lead acid battery

Work temperature:-10 $^{\circ}$ C -+40 $^{\circ}$ C

Humidity: \leq 85%RH

Battery enduring life:40 hours for continuously use(with 4pcs 350 Ω analog load cells)

Options:

Second display interface: serial RS232

Communication interface: RS232/RS485, baud rate 600/1200/2400/4800/9600


Printing interface: shared with serial interface, can be connected to serial printer(optional: desktop printer)

Bluetooth

Application:

Electronic Floor Scale, Bench scale , Logistics Scale , Pet Scale , Load Cells etc

Production Functions:

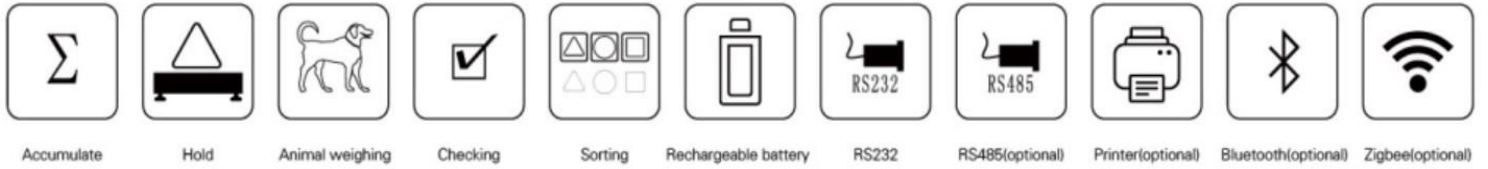

Dimensions: (mm)

