




### Digital Compression Load Cells ZTF-D

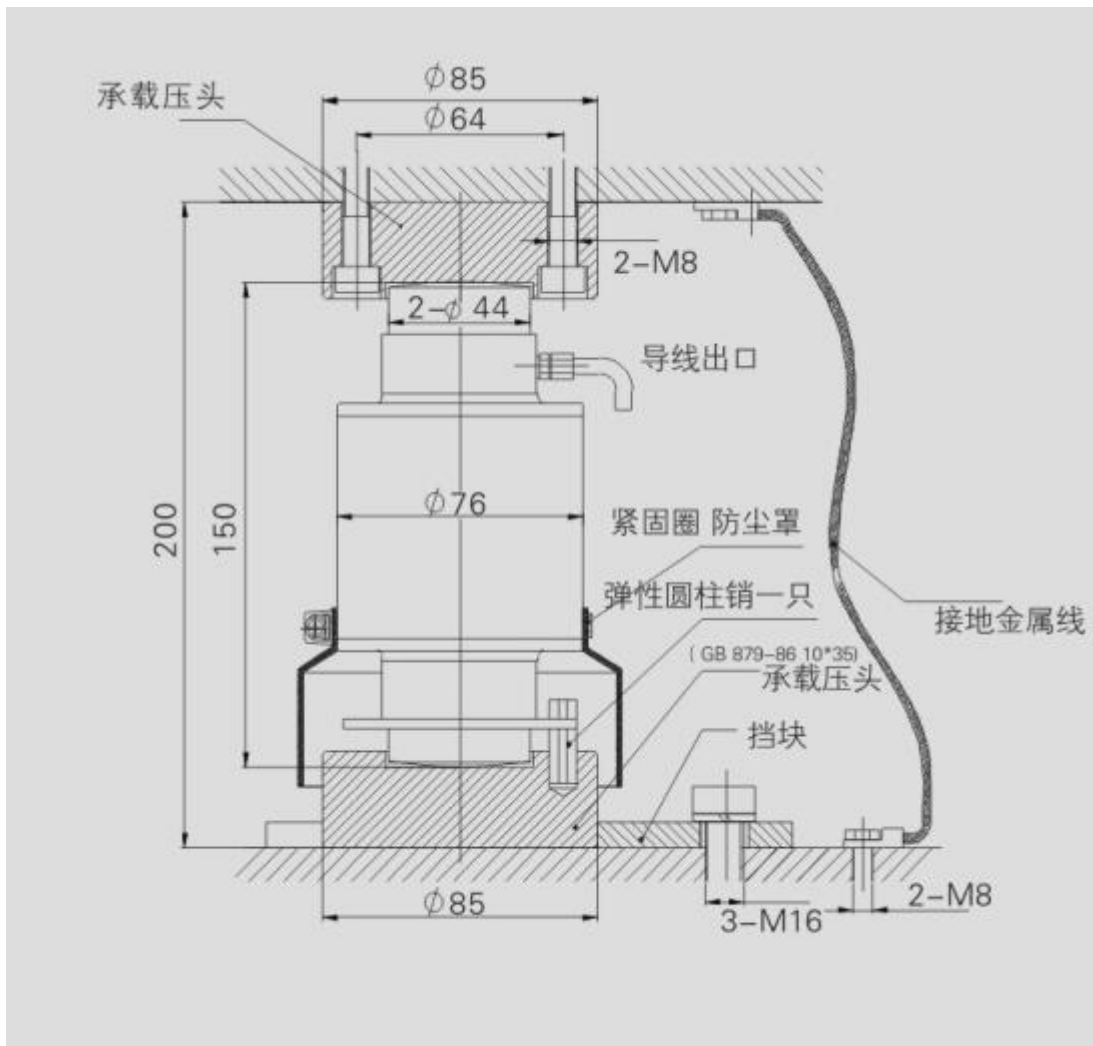

**Specification**

A/D Module Resolution	60000 code
Rated load	10,15,20,25,30,40,50t
Rated Output	20000,25000,30000,40000,50000 code
Digital Refurbishing Frequency	50 time/sec
Environmental Protection	IP68
Communication BRS	9600 BRS
Combined Error	±0.02%F.S
Maximum Excitation	20V DC
Creep(30min)	±0.02%F.S
Maximum Transmitting Distance	1200m
Temperature Effect	±0.02%F.S/10°C
Operating Temp Range	-30~+70°C
Zero Balance	±0.1%F.S
Safe overload	150%F.S
Recommended Excitation	9~12V DC